






1





2

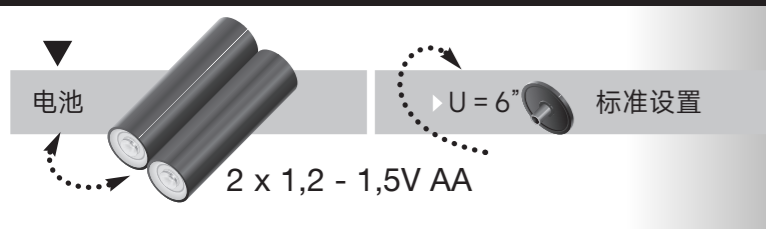


3

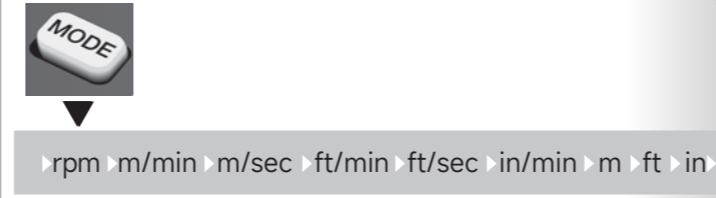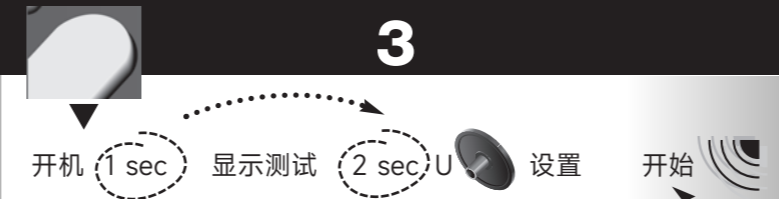

4

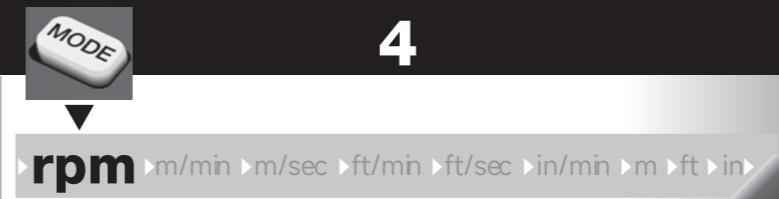

5

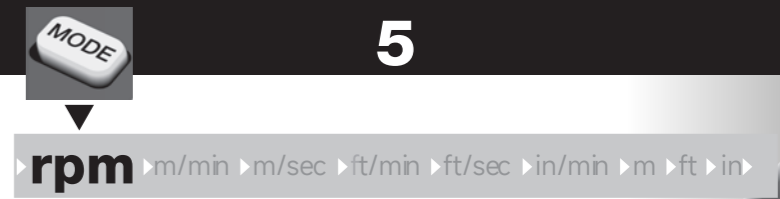



6

rpm ▶ **m/min** ▶ m/sec ▶ ft/min ft/sec ▶ in/min ▶ m ▶ ft ▶ in ▶

click

	U = 0.1m	U = 6"	U = 12"
m/min	0.10-1999	0.10-1524	0.40-609.5
ft/min	0.40-6550	0.40-5000	0.40-2000
in/min	4.00-78700	4.00-60000	4.00-24000
m/sec	0.10-33.30	0.10-25.40	0.10-10.16
ft/sec	0.10-109	0.10-83.33	0.10-33.33
m	0.00-99999	0.00-99999	0.00-99999
ft	0.00-99999	0.00-99999	0.00-99999
in	0.00-99999	0.00-99999	0.00-99999



7

操作

A

B

C



8

MEM ▶ MAX ▶ MIN ▶ AV ▶

rpm

MIN

AV

MAX

MEM

t

128.3

MEM

MODE



转速 (rpm) 精度: ±0.02% ±1 digit



自动关机: 30 秒 (数据存储状态下)




工作温度: 0 ~ 50°C / 32 ~ 122°F



存储温度: -20 ~ 70°C / -4 ~ 158°F



碱性电池续航: 约 40 小时



电源: 2 节 AA 碱性电池或可充电电池



注意事项

手持式数字转速仪

N0000.900A