


testo 865, testo 868, testo 871, testo 872, testo 865s, testo 868s, testo 871s, testo 872s





Wärmebildkamera / Thermal imager / Caméra thermique / 热像仪



<https://www.testo.com/manuals>

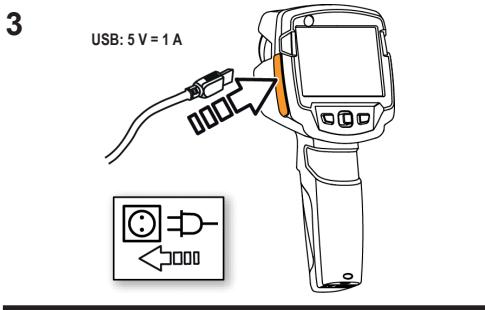

<https://www.testo.com/thermography-app>

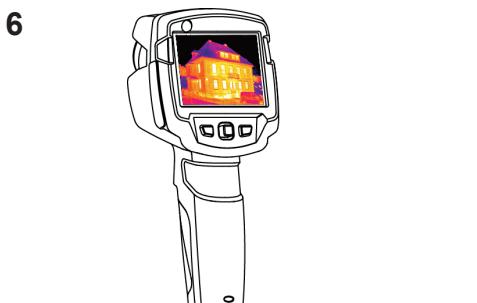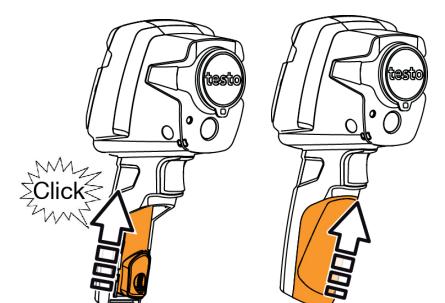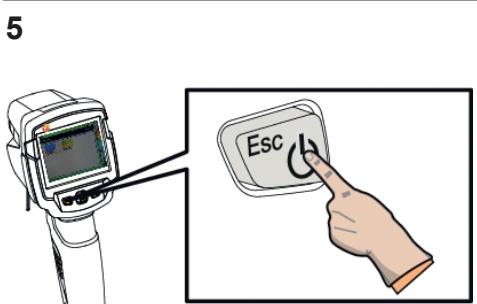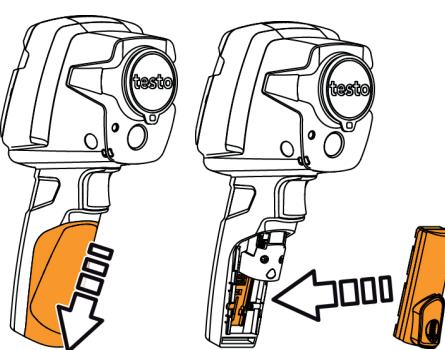

<https://www.testo.com/irsoft>

219 x 96 x 95 mm	510	2600 mAh / 3,6 V 4 hours	IP 54	-15 ... +50°C 	-30 ... +60°C

testo 865	31° x 23°	3,4 mrad	160 x 120 320 x 240	< 100 mK	-20 ... +280 °C	<p>-30 ... -20°C: ± 3 °C, else ± 2 °C, ± 2 % of m.v.</p>
testo 868	31° x 23°	3,4 mrad	160 x 120 320 x 240	< 80 mK	-30 ... +100 °C; 0 ... +650°C, Switch manual or automatic	
testo 871	35° x 26°	2,6 mrad	240 x 180 480 x 360	< 80 mK		
testo 872	42° x 30°	2,3 mrad	320 x 240 640 x 480	< 50 mK		

