

# testo 164

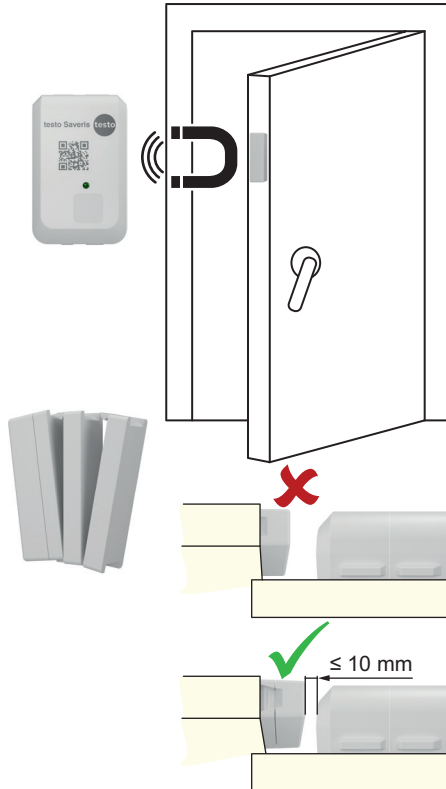

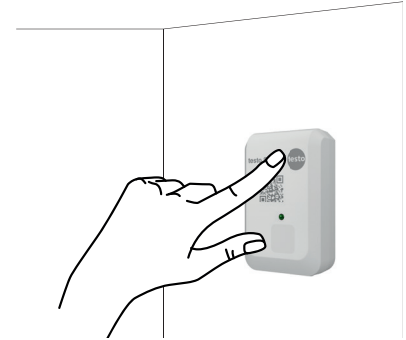


testo 164 T1 (0572 1641 xx), testo 164 H1 (0572 1644 xx), testo 164 DC (0572 1646 xx)



0572 1641 xx

0572 1644 xx

0572 1646 xx



[www.testo.com/manuals](http://www.testo.com/manuals)



<https://qr.testo.com/ldtw8z>










[www.saveris.testo.com/get-started](http://www.saveris.testo.com/get-started)

testo 164 T1 0572 1641 XX	62.6 x 38 x 17.5 mm 2.5 x 1.5 x 0.7 in	-30...+70 °C -22...+158 °F testo 164 H1: -10...+50 °C -14...+122 °F 	Lithium battery	-30 ... +85 °C -22 ... +185 °F	± 0.5 °C (-30 ... +50 °C) ± 0.9 °F (-22 ... +122 °F)	IP67	44 g 1.55 oz	
testo 164 H1 0572 1644 XX				-10 ... +50 °C -14 ... +122 °F				± 0.5 °C (-10 ... +50 °C) ± 0.9 °F (-14 ... +122 °F) ± 5 %RH ( 0 ... <10 %RH) ± 3 %RH (10 ... <35 %RH) ± 2 %RH (35 ... <65 %RH) ± 3 %RH (65 ... <90 %RH) ± 5 %RH (90 ... 100 %RH) ± 1 %RH hysteresis ± 1 %RH / drift per year ± 0.06%RH/K @ 0 ... 60 °C
testo 164 DC 0572 1646 XX				0 ... 100 % RH				-



# Approval and Certification

<b>Product</b>	testo 164 T1 EU testo 164 DC EU testo 164 H1 EU
<b>Mat.-No.</b>	0572 1641 01 0572 1646 01 0572 1644 01
<b>Model No.</b>	0572 2201 01 0572 2203 01 0572 2211 01
<b>Date</b>	26.12.2024

 The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the re-sale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments														
Europa + EFTA	 <p> Hereby, Testo SE &amp; Co. KGaA declares that the radio equipment types testo 164 T1 EU (0572 2201 01), testo 164 DC EU (0572 2203 01) and testo 164 H1 EU (0572 2211 01) are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <a href="https://www.testo.com/eu-conformity">https://www.testo.com/eu-conformity</a></p> <p><b>EU countries:</b> Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), Republic of Cyprus (CY).</p> <p><b>EFTA countries:</b> Iceland, Liechtenstein, Norway, Switzerland</p>  WEEE Reg. no.: DE 75334352														
South Africa	 <p>0572 2201 01: TA-2022/2751 0572 2203 01: TA-2022/2772</p>														
Türkiye	Approved														
United Arab Emirates	0572 2201 01: ER18539/23														
United Kingdom (UK)	 <p> The UK Declaration of Conformity can be found on the testo homepage <a href="http://www.testo.com">www.testo.com</a> under the product specific downloads.</p>														
<b>Module</b>	<table border="1"> <thead> <tr> <th>Feature</th> <th>Values</th> </tr> </thead> <tbody> <tr> <td>Radio range</td> <td>up to 200 m (650 feet) (free field)</td> </tr> <tr> <td>Type</td> <td>Lierda L-RFOMD40-04594-01</td> </tr> <tr> <td>RF Band</td> <td>865 to 868 MHz (L-Band)</td> </tr> <tr> <td>Output power</td> <td>12.5 dBm</td> </tr> <tr> <td>Antenna gain</td> <td>max -1.13 dBi</td> </tr> <tr> <td>Company</td> <td>Lierda Technology Group Co., Ltd.</td> </tr> </tbody> </table>	Feature	Values	Radio range	up to 200 m (650 feet) (free field)	Type	Lierda L-RFOMD40-04594-01	RF Band	865 to 868 MHz (L-Band)	Output power	12.5 dBm	Antenna gain	max -1.13 dBi	Company	Lierda Technology Group Co., Ltd.
Feature	Values														
Radio range	up to 200 m (650 feet) (free field)														
Type	Lierda L-RFOMD40-04594-01														
RF Band	865 to 868 MHz (L-Band)														
Output power	12.5 dBm														
Antenna gain	max -1.13 dBi														
Company	Lierda Technology Group Co., Ltd.														
EN12830	testo 164 T1 EU Acc. to EN12830-S, 0,5 -30 ... +85 °C IIIb														
	<b>Comments</b>														
Hongkong	Authorized														

<b>Product</b>	testo 164 T1 FCC testo 164 DC FCC testo 164 H1 FCC
<b>Mat.-No.</b>	0572 1641 02 0572 1646 02 0572 1644 02
<b>Model No.</b>	0572 2201 02 0572 2203 02 0572 2211 02

Country	Comments																				
Australia	 E 1561																				
Canada	<p>0572 2201 02 IC ID: 6127B-0572220102 0572 2203 02 IC ID: 6127B-0572220302 0572 2211 02 IC ID: 6127B-0572221102</p> <p>See IC Warnings</p>																				
Trinidad and Tobago	0572 2203 02 Approved																				
USA	 <p>0572 2201 02 FCC ID: WAF-0572220102 0572 2203 02 FCC ID: WAF-0572220302 0572 2211 02 FCC ID: WAF-0572221102</p> <p>See FCC Warnings</p>																				
<b>Module</b>	<table border="1"> <thead> <tr> <th>Feature</th> <th>Values</th> </tr> </thead> <tbody> <tr> <td>Radio range</td> <td>up to 200 m (650 feet) (free field)</td> </tr> <tr> <td>Type</td> <td>Lierda L-RFOMD40-04594-01</td> </tr> <tr> <td>RF Band</td> <td>915 to 928 MHz</td> </tr> <tr> <td>Modulation</td> <td>GFSK</td> </tr> <tr> <td>Output power</td> <td>12.5 dBm</td> </tr> <tr> <td>Transm. rate</td> <td>50 kBit/s</td> </tr> <tr> <td>Antenna gain</td> <td>max -1.13 dBi</td> </tr> <tr> <td>Antenna Part Number</td> <td>0263 0009</td> </tr> <tr> <td>Company</td> <td>Lierda Technology Group Co., Ltd.</td> </tr> </tbody> </table>	Feature	Values	Radio range	up to 200 m (650 feet) (free field)	Type	Lierda L-RFOMD40-04594-01	RF Band	915 to 928 MHz	Modulation	GFSK	Output power	12.5 dBm	Transm. rate	50 kBit/s	Antenna gain	max -1.13 dBi	Antenna Part Number	0263 0009	Company	Lierda Technology Group Co., Ltd.
Feature	Values																				
Radio range	up to 200 m (650 feet) (free field)																				
Type	Lierda L-RFOMD40-04594-01																				
RF Band	915 to 928 MHz																				
Modulation	GFSK																				
Output power	12.5 dBm																				
Transm. rate	50 kBit/s																				
Antenna gain	max -1.13 dBi																				
Antenna Part Number	0263 0009																				
Company	Lierda Technology Group Co., Ltd.																				

# IC Warnings

## CAN ICES-003(B)/NMB-003(B):

This Class B digital apparatus complies with Canadian ICES-003.  
Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

RSS-Gen & RSS-247 statement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:  
(1) this device may not cause interference, and  
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

(1) L'appareil ne doit pas produire de brouillage  
(2) l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**Caution:** Radio Frequency Radiation Exposure

This equipment complies with radio frequency exposure limits set forth by the Innovation, Science and Economic Development Canada for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 cm between the device and the user or bystanders.

**Co-Location:** This device must not be co-located or operated in conjunction with any other antenna or transmitter.

**Attention :** exposition au rayonnement de radiofréquences

Cet équipement est conforme aux limites d'exposition aux radiofréquences définies par la Innovation, Sciences et Développement économique Canada pour un environnement non contrôlé.

Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre le dispositif et l'utilisateur ou des tiers

**Co-location :** Ce dispositif ne doit pas être utilisé à proximité d'une autre antenne ou d'un autre émetteur.

# FCC Warnings

## Information from the FCC (Federal Communications Commission)

### For your own safety

Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

### FCC warning statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cable must be used in order to comply with the emission limits.

### Warning

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) this device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.

### Caution:

Radio Frequency Radiation Exposure

This equipment complies with radio frequency exposure limits set forth by the FCC for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 cm between the device and the user or bystanders.

### Co-Location:

This device must not be co-located or operated in conjunction with any other antenna or transmitter.

<b>Product</b> 产品名称	testo 164 T1 CN 无线传感器 testo 164 DC CN 无线传感器 testo 164 H1 CN 无线传感器
<b>Mat.-No.</b> 材料号	0572 1641 03 0572 1646 03 0572 1644 03
<b>Model No.</b> 型号	0572 2201 03 0572 2203 03 0572 2211 03

Country	Comments										
China	Approved										
Philippines	0572 2201 03: Approved 0572 2203 03: Approved										
<b>Module</b> 通讯模块	<table border="1"> <thead> <tr> <th>Feature / 特征与参数</th> <th>Values / 数值</th> </tr> </thead> <tbody> <tr> <td>Radio range 无线电范围</td> <td>up to 200 m (650 feet) (free field / 无障碍场地)</td> </tr> <tr> <td>Radio type / 类型</td> <td>Lierda L-RFOMD40-04594-01</td> </tr> <tr> <td>RF Band / 射频频段</td> <td>868.0 to 868.6 MHz</td> </tr> <tr> <td>Company / 制造商</td> <td>Lierda Technology Group Co., Ltd.</td> </tr> </tbody> </table>	Feature / 特征与参数	Values / 数值	Radio range 无线电范围	up to 200 m (650 feet) (free field / 无障碍场地)	Radio type / 类型	Lierda L-RFOMD40-04594-01	RF Band / 射频频段	868.0 to 868.6 MHz	Company / 制造商	Lierda Technology Group Co., Ltd.
Feature / 特征与参数	Values / 数值										
Radio range 无线电范围	up to 200 m (650 feet) (free field / 无障碍场地)										
Radio type / 类型	Lierda L-RFOMD40-04594-01										
RF Band / 射频频段	868.0 to 868.6 MHz										
Company / 制造商	Lierda Technology Group Co., Ltd.										

\* 符合“微功率短距离无线电发射设备目录和技术要求”中通用无线遥控设备技术要求，用于数据传输应用。采用内置天线。

\* 不得擅自改变使用场景或使用条件，扩大发射频率范围、加大发射功率（包括额外加装射频功率放大器），不得擅自更改发射天线。

\* 不得对其他合法的无线电台（站）产生有害干扰，也不得提出免受有害干扰保护。

\* 应当承受辐射射频能量的工业、科学及医疗（ISM）应用设备的干扰或



其他合法的无线电台（站）干扰。

\* 如对其他合法的无线电台（站）产生有害干扰时，应立即停止使用，并采取措施消除干扰后方可继续使用。

\* 在航空器内和依据法律法规、国家有关规定、标准划设的射电天文台、气象雷达站、卫星地球站（含测控、测距、接收、导航站）等军用无线电台（站）、机场等的电磁环境保护区域内使用微功率设备，应当遵守电磁环境保护及相关行业主管部门的规定。

\* 微功率部分使用时温度和电压的环境条件（温度见说明书，由内部电池供电）



<b>Product</b>	testo 164 T1 JP testo 164 DC JP
<b>Mat.-No.</b>	0572 1641 04 0572 1646 04
<b>Model No.</b>	0572 2201 04 0572 2203 04

Country	Comments														
Japan	<p>0572 2201 04:  214-124261 0572 2203 04:  214-124263</p> <p>See Japan Information</p>														
<b>Module</b>	<table border="1"> <thead> <tr> <th>Feature</th> <th>Values</th> </tr> </thead> <tbody> <tr> <td>Radio range</td> <td>up to 200 m (650 feet) (free field)</td> </tr> <tr> <td>Type</td> <td>Lierda L-RFOMD40-04594-01</td> </tr> <tr> <td>RF Band</td> <td>922.4 to 928 MHz</td> </tr> <tr> <td>Output power</td> <td>12.5 dBm</td> </tr> <tr> <td>Antenna gain</td> <td>max -1.13 dBi</td> </tr> <tr> <td>Company</td> <td>Lierda Technology Group Co., Ltd.</td> </tr> </tbody> </table>	Feature	Values	Radio range	up to 200 m (650 feet) (free field)	Type	Lierda L-RFOMD40-04594-01	RF Band	922.4 to 928 MHz	Output power	12.5 dBm	Antenna gain	max -1.13 dBi	Company	Lierda Technology Group Co., Ltd.
Feature	Values														
Radio range	up to 200 m (650 feet) (free field)														
Type	Lierda L-RFOMD40-04594-01														
RF Band	922.4 to 928 MHz														
Output power	12.5 dBm														
Antenna gain	max -1.13 dBi														
Company	Lierda Technology Group Co., Ltd.														

# Japan-Information

当該機器には電波法に基づく、技術基準適合証明等を受けた特定無線設備を装着している。

<b>Product</b>	testo 164 T1 KR testo 164 DC KR
<b>Mat.-No.</b>	0572 1641 05 0572 1646 05
<b>Model No.</b>	0572 2201 05 0572 2203 05

Country	Comments														
South Korea	<p>0572 2201 05:  R-R-te2-05722201 Contains: R-R-te2-03440031</p> <p>0572 2203 05:  R-R-te2-05722203 Contains: R-R-te2-03440031</p> <p>See KCC Warning</p>														
<b>Module</b>	<table border="1"> <thead> <tr> <th>Feature</th> <th>Values</th> </tr> </thead> <tbody> <tr> <td>Radio range</td> <td>up to 200 m (650 feet) (free field)</td> </tr> <tr> <td>Type</td> <td>Lierda L-RFOMD40-04594-01</td> </tr> <tr> <td>RF Band</td> <td>922.3 to 923.1 MHz</td> </tr> <tr> <td>Output power</td> <td>12.5 dBm</td> </tr> <tr> <td>Antenna gain</td> <td>Max. -6.11 dBi</td> </tr> <tr> <td>Company</td> <td>Lierda Science &amp; Technology Group Co., Ltd.</td> </tr> </tbody> </table>	Feature	Values	Radio range	up to 200 m (650 feet) (free field)	Type	Lierda L-RFOMD40-04594-01	RF Band	922.3 to 923.1 MHz	Output power	12.5 dBm	Antenna gain	Max. -6.11 dBi	Company	Lierda Science & Technology Group Co., Ltd.
Feature	Values														
Radio range	up to 200 m (650 feet) (free field)														
Type	Lierda L-RFOMD40-04594-01														
RF Band	922.3 to 923.1 MHz														
Output power	12.5 dBm														
Antenna gain	Max. -6.11 dBi														
Company	Lierda Science & Technology Group Co., Ltd.														


# KCC Warning

이 기기는 사용 중 전파 혼신 가능성이 있으며, 타기기로 부터 유해한 혼신을 받을 수 있음

<b>Product</b>	testo 164 T1 IN testo 164 DC IN testo 164 H1 IN
<b>Mat.-No.</b>	0572 1641 06 0572 1646 06 0572 1644 06
<b>Model No.</b>	0572 2201 06 0572 2203 06 0572 2211 06

Country	Comments														
India	Approved														
<b>Module</b>	<table border="1"> <thead> <tr> <th>Feature</th> <th>Values</th> </tr> </thead> <tbody> <tr> <td>Radio range</td> <td>up to 200 m (650 feet) (free field)</td> </tr> <tr> <td>Type</td> <td>Lierda L-RFOMD40-04594-01</td> </tr> <tr> <td>RF Band</td> <td>865 to 867 MHz</td> </tr> <tr> <td>Output power</td> <td>12.5 dBm</td> </tr> <tr> <td>Antenna gain</td> <td>max -1.13 dBi</td> </tr> <tr> <td>Company</td> <td>Lierda Technology Group Co., Ltd.</td> </tr> </tbody> </table>	Feature	Values	Radio range	up to 200 m (650 feet) (free field)	Type	Lierda L-RFOMD40-04594-01	RF Band	865 to 867 MHz	Output power	12.5 dBm	Antenna gain	max -1.13 dBi	Company	Lierda Technology Group Co., Ltd.
Feature	Values														
Radio range	up to 200 m (650 feet) (free field)														
Type	Lierda L-RFOMD40-04594-01														
RF Band	865 to 867 MHz														
Output power	12.5 dBm														
Antenna gain	max -1.13 dBi														
Company	Lierda Technology Group Co., Ltd.														

<b>Product</b>	testo 164 T1 testo 164 DC
<b>Mat.-No.</b>	0572 1641 0x 0572 1646 0x
<b>Model No.</b>	0572 2201 0x 0572 2203 0x

Certification	Comments
NSF	
0572 2201 0x 0572 2203 0x (x = 1, 2, 3, 4, 5, 6, 7)	

# Manufacturer/ importer

Testo SE & Co. KG aA  
Celsiusstr. 2, 79822 Titisee-Neustadt, Germany  
+49 7653 681-0  
www.testo.com

Warning: Please follow the instructions when using the product.