



testo 190-T1, testo 190-T2, testo 190-T3,
testo 190-T4, testo 190-P1



testo 191-T1, testo 191-T2, testo 191-T3,
testo 191-T4, testo 191-P1

1




2



0515 1900

0515 1901


3

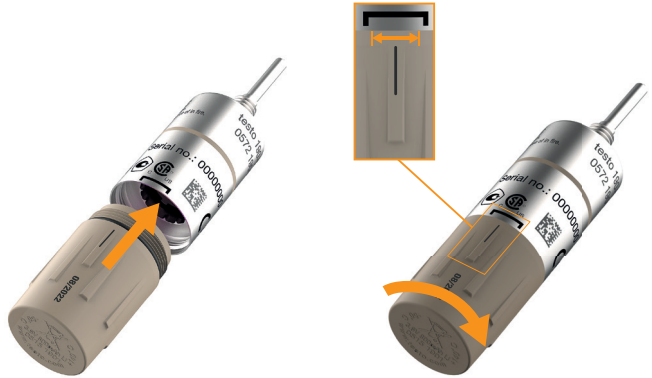


4



5

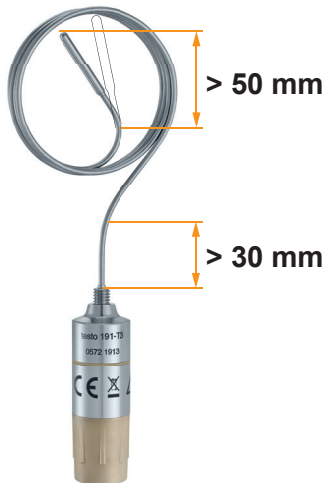

6

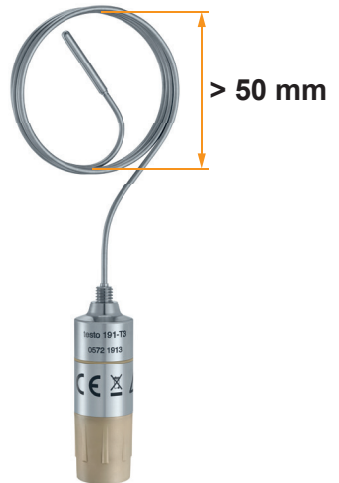

testo 190-T1, testo 191-T1	47 g	IP68		0,1 °C 0.1 °F	-50 ... +140 °C -58 ... +284 °F	0,1 °C (-40 °C ... +140 °C) 0.1 °F (-40 ... +284 °F) 0,2 °C (-50 °C ... -40 °C) 0.4 °F (-58 ... -40 °F)
testo 190-T2, testo 191-T2	48 g					
testo 190-T3, testo 191-T3	61 g					
testo 190-T4, testo 191-T4	92 g					
testo 190-P1, testo 191-P1	91 g			1 mbar	1 mbar ... 4 bar	±20 mbar

testo 190-T1, testo 191-T1	20 x 40 mm	20 x 59 mm	3 x 25 mm	—
testo 190-T2, testo 191-T2			3 x 115 mm	
testo 190-T3, testo 191-T3	20 x 45 mm	20 x 63 mm	1,5 x 775 mm	3 x 25 mm
testo 190-T4, testo 191-T4	20 x 53 mm	20 x 72 mm		
testo 190-P1, testo 191-P1	22 x 64 mm	22 x 83 mm	—	—

 0515 1900		250 h
 0515 1901		2 500 h



Guideline	2014/30/EU (EMC); 2011/65/EU (RoHS)
EU declaration of conformity	You can find the EU declaration of conformity on the Testo website www.testo.com under the product-specific downloads.