



Be sure. **testo**

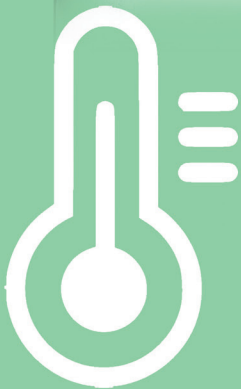

Measure smarter faster.

All climate data loggers from Testo at a glance.

You know what you need – and we have the perfect data loggers for you.

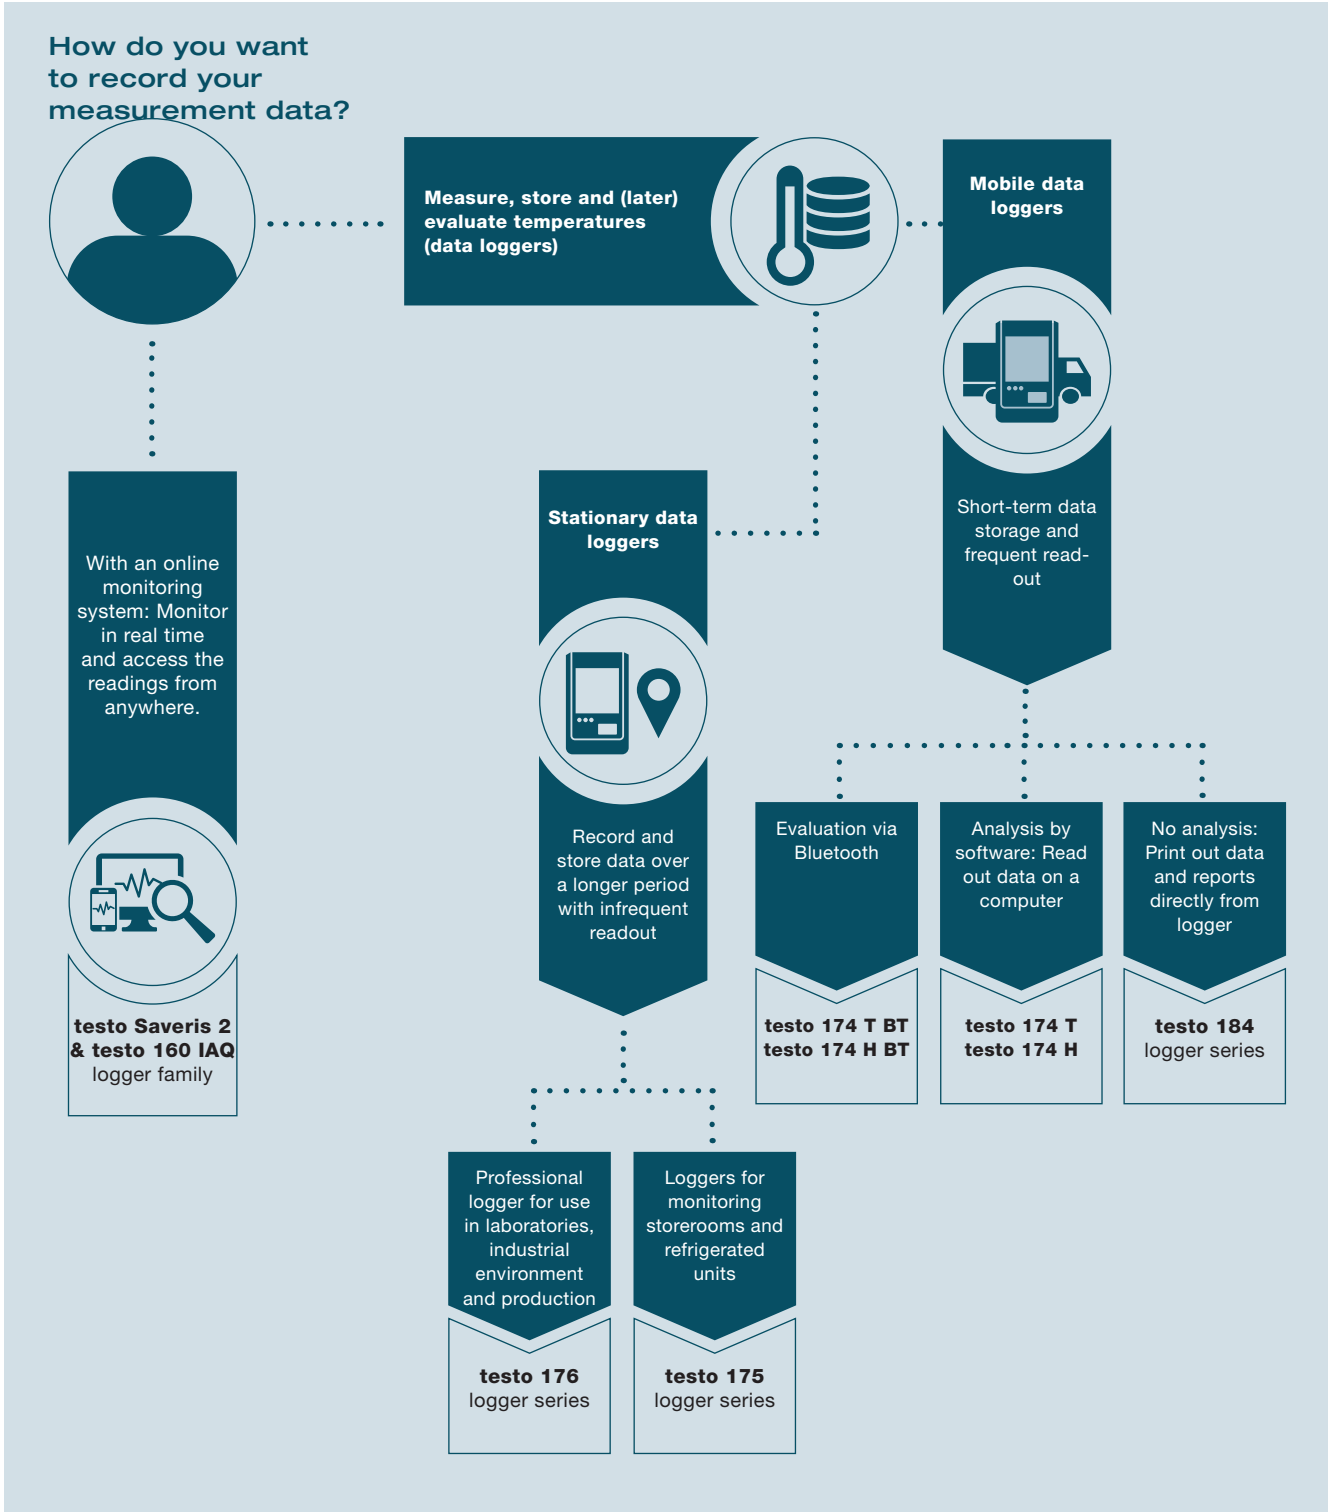

Ready for use in transport and storage: **testo 174 series** – also with food certification



Mobile data loggers


testo 174 loggers in comparison



Data loggers testo 174 T and testo 174 T BT are NSF certified



All data loggers are HACCP certified



General data

Brief description	Mini temperature data logger with USB-C and PC software testo 174 T, 1-channel, incl. free ComSoft Basic software, wall bracket, battery (2 x CR 2032 lithium), USB 2.0 data transfer cable and test report	Mini data loggers for temperature and humidity with USB-C and PC software testo 174 H, 2-channel, incl. free ComSoft Basic software, wall bracket, battery (2 x CR 2032 lithium), USB 2.0 data transfer cable and test report	Mini temperature data logger with app connection testo 174 T, 1 channel, includes wall bracket, batteries (2 x CR2032 Lithium) and test report	Mini data logger testo 174 H BT for temperature and humidity with app connection, 2 channel, incl. wall bracket, batteries (2 x CR 2032 lithium) and test report
Order number	0572 1740 01	0572 1741 01	0572 1742 01	0572 1743 01
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR	XX.XX EUR

Technical data

Measurement parameter	Temperature	Temperature & humidity	Temperature	Temperature & humidity
Easy-to-read display	✓	✓	✓	✓
Channels	1 x internal	2 x internal	1 x internal	2 x internal
Measuring range	-30 to +70 °C	-30 to +70 °C / 0 to 100 %RH*	-30 to +70 °C	-30 to +70 °C / 0 to 100 %RH*
Accuracy	±0.5 °C (-30 to +70 °C)	±0.5 °C (-30 to +70 °C) ±3 %RH (2 to 98 %RH) ±0.03 %RH/K	±0.5 °C (-30 to +70 °C)	±0.5 °C (-30 to +70 °C) ±3 %RH (2 to 98 %RH) ±0.03 %RH/K
Solution	0,1 °C	0.1 °C / 0.1 %RH	0,1 °C	0.1 °C / 0.1 %RH
Measuring cycle	1 min to 24 h	1 min to 24 h	1 min to 24 h	1 min to 24 h
Memory capacity	16,000 readings	16,000 readings	16,000 readings	16,000 readings
Connection/connector	USB-C	USB-C	Bluetooth	Bluetooth
Software	testo ComSoft Basic testo ComSoft Professional	testo ComSoft Basic testo ComSoft Professional	testo Smart App	testo Smart App
Operating/storage temperature	-30 to +70 °C / -40 to +70 °C	-20 to +70 °C / -40 to +70 °C	-30 to +70 °C / -40 to +70 °C	-20 to +70 °C / -40 to +70 °C
Battery life	500 days (15 min. measuring cycle, +25 °C)	500 days (15 min. measuring cycle, +25 °C)	1 year (15 min. measuring cycle, +25 °C)	1 year (15 min. measuring cycle, +25 °C)
Dimensions/weight	60 x 38 x 18.5 mm / 35 g	60 x 38 x 18.5 mm / 35 g	60 x 38 x 18.5 mm / 35 g	60 x 38 x 18.5 mm / 35 g
Protection class	IP65	IP20	IP65	IP20
Certification	EN12830, HACCP, NSF	HACCP	EN12830, HACCP, NSF	HACCP

* Not for condensing atmospheres. For continuous application in high humidity (>80 %RH at ≤30 °C for >12 h, >60 %RH at >30 °C for >12 h). Please contact us via our website.



For a healthy indoor climate: testo 174 series

testo 174 loggers in comparison



testo 174 T

testo 174 H

testo 174 T BT

testo 174 H BT

General data				
Brief description	Mini temperature data logger with USB-C and PC software testo 174 T, 1-channel, incl. free ComSoft Basic software, wall bracket, battery (2 x CR 2032 lithium), USB 2.0 data transfer cable and test report	Mini data loggers for temperature and humidity with USB-C and PC software testo 174 H, 2-channel, incl. free ComSoft Basic software, wall bracket, battery (2 x CR 2032 lithium), USB 2.0 data transfer cable and test report	Mini temperature data logger with app connection testo 174 T, 1 channel, includes wall bracket, batteries (2 x CR2032 Lithium) and test report	Mini data logger testo 174 H BT for temperature and humidity with app connection, 2 channel, incl. wall bracket, batteries (2 x CR 2032 lithium) and test report
Order number	0572 1740 02	0572 1741 02	0572 1742 02	0572 1743 02
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR	XX.XX EUR
Technical data				
Measurement parameter	Temperature	Temperature & humidity	Temperature	Temperature & humidity
Easy-to-read display	✓	✓	✓	✓
Channels	1 x internal	2 x internal	1 x internal	2 x internal
Measuring range	-30 to +70 °C	-30 to +70 °C / 0 to 100 %RH*	-30 to +70 °C	-30 to +70 °C / 0 to 100 %RH*
Accuracy	±0.5 °C (-30 to +70 °C)	±0.5 °C (-30 to +70 °C) ±3 %RH (2 to 98 %RH) ±0.03 %RH/K	±0.5 °C (-30 to +70 °C)	±0.5 °C (-30 to +70 °C) ±3 %RH (2 to 98 %RH) ±0.03 %RH/K
Solution	0,1 °C	0.1 °C / 0.1 %RH	0,1 °C	0.1 °C / 0.1 %RH
Measuring cycle	1 min to 24 h	1 min to 24 h	1 min to 24 h	1 min to 24 h
Memory capacity	16,000 readings	16,000 readings	16,000 readings	16,000 readings
Connection/connector	USB-C	USB-C	Bluetooth	Bluetooth
Software	testo ComSoft Basic testo ComSoft Professional	testo ComSoft Basic testo ComSoft Professional	testo Smart App	testo Smart App
Operating/storage temperature	-30 to +70 °C / -40 to +70 °C	-20 to +70 °C / -40 to +70 °C	-30 to +70 °C / -40 to +70 °C	-20 to +70 °C / -40 to +70 °C
Battery life	500 days (15 min. measuring cycle, +25 °C)	500 days (15 min. measuring cycle, +25 °C)	1 year (15 min. measuring cycle, +25 °C)	1 year (15 min. measuring cycle, +25 °C)
Dimensions/weight	60 x 38 x 18.5 mm / 35 g	60 x 38 x 18.5 mm / 35 g	60 x 38 x 18.5 mm / 35 g	60 x 38 x 18.5 mm / 35 g
Protection class	IP65	IP20	IP65	IP20
Certification	EN12830		EN12830	

* Not for condensing atmospheres. For continuous application in high humidity (>80 %RH at ≤30 °C for >12 h, >60 %RH at >30 °C for >12 h). Please contact us via our website.

In transit for you up to 500 days: testo 184 series



Mobile
data
loggers

testo 184 loggers in comparison



All data loggers HACCP-certified



testo 184 T1



testo 184 T2



testo 184 T3

General data

Brief description	USB data logger for temperature, operating time 90 days.	USB data logger for temperature, operating time 150 days.	USB data logger for temperature, unlimited operating time thanks to replaceable battery.
Order number	0572 1841	0572 1842	0572 1843
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR

Technical data

Measurement parameter	Temperature	Temperature	Temperature
Immediate creation of a PDF report after connecting to a PC	✓	✓	✓
Especially for transportation temperatures as low as -80 °C	✗	✗	✗
Channels	1 x internal	1 x internal	1 x internal
Measuring range	-35 to +70 °C	-35 to +70 °C	-35 to +70 °C
Accuracy	±0.5 °C	±0.5 °C	±0.5 °C
Solution	0,1 °C	0,1 °C	0,1 °C
Measuring cycle	1 min to 24 h	1 min to 24 h	1 min to 24 h
Memory capacity	16,000 readings	40,000 readings	40,000 readings
Interface	USB interface	USB interface	USB interface
Software	testo ComSoft Professional testo ComSoft CFR	testo ComSoft Professional testo ComSoft CFR	testo ComSoft Professional testo ComSoft CFR
Operating/storage temperature	-35 to +70 °C / -55 to +70 °C	-35 to +70 °C / -55 to +70 °C	-35 to +70 °C / -55 to +70 °C
Battery life	-	-	500 days (at +25 °C and 15 min. measuring cycle)
Dimensions/weight	33 x 9 x 74 mm / 25 g	44 x 12 x 97 mm / 45 g	44 x 12 x 97 mm / 45 g
Protection class	IP 67	IP 67	IP 67
EN certificate	EN 12830	EN 12830	EN 12830

Mobile data loggers



In transit for you up to 500 days: testo 184 series

testo 184 loggers in comparison



All data loggers HACCP-certified



testo 184 T4



testo 184 H1



testo 184 G1

General data			
Brief description	USB data logger for temperature, unlimited operating time thanks to replaceable battery.	USB data logger for temperature and humidity, unlimited operating time thanks to replaceable battery.	USB data logger for temperature, humidity and shock, unlimited operating time thanks to replaceable battery.
Order number	0572 1844	0572 1845	0572 1846
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR
Technical data			
Measurement parameter	Temperature	Temperature & humidity	Temperature, humidity & shock
Immediate creation of a PDF report after connecting to a PC	✓	✓	✓
Especially for transportation temperatures as low as -80 °C	✓	✗	✗
Channels	1 x internal	2 x internal	5 x internal
Measuring range	-80 to +70 °C	-20 to +70 °C / 0 to 100 %RH	-20 to +70 °C / 0 to 100 %RH 0 to 27 g
Accuracy	±0.8 °C (-80 to -35.1 °C) ±0.5 °C (-35 to +70 °C)	±0.5 °C (0 to +70 °C) ±0.8 °C (-20 to 0 °C) ±1.8 %RH + 3% of m.v. at +25 °C (5 to 80 %RH)	±0.5 °C (0 to +70 °C) ±0.8 °C (-20 to 0 °C) ±1.8 %RH + 3% of m.v. at +25 °C (5 to 80 %RH) ±0.03 %RH / K (0 to 60 °C) ±0.1 g + 5% of m.v.
Solution	0,1 °C	0.1 °C / 0.1 %RH	0.1 °C / 0.1 %RH / 0.1 g
Measuring cycle	1 min to 24 h	1 min to 24 h	1 min to 24 h / 1 s
Memory capacity	40,000 readings	64,000 readings	64,000 readings (temperature and humidity) 1,000 readings (shock)
Interface	USB interface	USB interface	USB interface
Software	testo ComSoft Professional testo ComSoft CFR	testo ComSoft Professional testo ComSoft CFR	testo ComSoft Professional testo ComSoft CFR
Operating/storage temperature	-80 to +70 °C / -80 to +70 °C	-20 to +70 °C / -55 to +70 °C	-20 to +70 °C / -55 to +70 °C
Battery life	100 days (with 15 min measurement rate)	500 days (at +25 °C and 15 min. measuring cycle)	120 days (at +25 °C and 15 min. measuring cycle)
Dimensions/weight	44 x 12 x 97 mm / 45 g	44 x 12 x 97 mm / 45 g	44 x 12 x 97 mm / 45 g
Protection class	IP 67	IP 30	IP 30
EN certificate	EN 12830	✗	✗

Specialized in storage facility management: **testo 175 series**



Stationary data loggers

testo 175 loggers in comparison



All data loggers
HACCP-certified



testo 175 T1



testo 175 T2

General data		
Brief description	1-channel temperature data logger with internal sensor (NTC), incl. wall bracket, lock, batteries, testo ComSoft Basic and calibration protocol	2-channel temperature data logger with internal (NTC) and external sensor connection (NTC), incl. wall bracket, lock, batteries, testo ComSoft Basic and calibration protocol
Order number	0572 1751	0572 1752
Recommended selling price	XX.XX EUR	XX.XX EUR
Technical data		
Measurement parameter	Temperature	Temperature
Easy-to-read display	✓	✓
Mobile readout/ Onsite printing	✓	✓
Channels	1 x internal	1 x internal, 1 x external
Measuring range	-35 to +55 °C	-35 to +55 °C int. -40 to +120 °C ext.
Accuracy *±1 digit	±0.4 °C (-35 to +55 °C)*	±0.5 °C (-35 to +55 °C)* ±0.3 °C (-40 to +120 °C)*
Solution	0,1 °C	0,1 °C
Measuring cycle	10 sec to 24 h	10 sec to 24 h
Memory capacity	1 million readings	1 million readings
Interface	Mini USB, SD card slot	Mini USB, SD card slot
Software	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR
Operating/storage temperature	-35 to +55 °C	-35 to +55 °C
Battery life	3 years (15 min. measuring cycle, +25 °C)	3 years (15 min. measuring cycle, +25 °C)
Dimensions/weight	89 x 53 x 27 mm / 130 g	89 x 53 x 27 mm / 130 g
Protection class	IP 65	IP 65
EN certificate	EN 12830	EN 12830

Stationary data loggers



Specialized in storage facility management: **testo 175 series**

testo 175 loggers in comparison



testo 175 T3



testo 175 H1

General data		
Brief description	2-channel temperature data logger with external sensor connections (TC Type T and Type K) including wall bracket, lock, batteries, testo ComSoft Basic and calibration protocol	2-channel temperature and humidity data logger with external humidity sensor (NTC/capacitive humidity sensor) including wall bracket, lock, batteries, testo ComSoft Basic and calibration protocol
Order number	0572 1753	0572 1754
Recommended selling price	XX.XX EUR	XX.XX EUR
Technical data		
Measurement parameter	Temperature	Temperature & humidity
Easy-to-read display	✓	✓
Mobile readout/printout on site	✓	✓
Channels	2 x external	2 x internal (stump)
Measuring range	-50 to +400 °C (Type T) -50 to +1000 °C (Type K)	-20 to +55 °C 0 to 100 %RH
Accuracy *±1 digit	±0.5 °C (-50 to +70 °C)* ±0.7 % of m.v. (+70.1 to +1000 °C)* (Type K) ±0.5 °C (-50 to +70 °C)* ±0.7 % of m.v. (70.1 to +400 °C)* (Type T)	±0.4 °C (-20 to +55 °C)* ±2 %RH (2 to 98 %RH) at +25 °C ±0.03 %RH/K*
Solution	0,1 °C	0.1 °C / 0.1 %RH
Measuring cycle	10 sec to 24 h	10 sec to 24 h
Memory capacity	1 million readings	1 million readings
Interface	Mini USB, SD card slot	Mini USB, SD card slot
Software	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR
Operating/storage temperature	-20 to +55 °C	-20 to +55 °C
Battery life	3 years (15 min. measuring cycle, +25 °C)	3 years (15 min. measuring cycle, +25 °C)
Dimensions/weight	89 x 53 x 27 mm / 130 g	149 x 53 x 27 mm / 130 g
Protection class	IP 65	IP 54
EN certificate	☐	☐

Extra-high-precision for monitoring production: **testo 176 T2 / T4 / H1 / P1**



Stationary data loggers

testo 176 loggers in comparison



All data loggers HACCP-certified



testo 176 T2



testo 176 T4



testo 176 H1



testo 176 P1

General data				
Brief description	2-channel temperature data logger with connections for high-precision external sensors (Pt100), incl. wall bracket, lock, battery, testo ComSoft Basic and calibration protocol	4-channel temperature data logger with external sensor connections (TC Type T, Type K and Type J), including wall bracket, battery, testo ComSoft Basic and calibration protocol	4channel temperature and humidity data logger with external sensor connections (NTC/ capacitive humidity sensor) including wall bracket, lock, battery, testo ComSoft Basic and calibration protocol	5-channel pressure, temperature and humidity data logger with internal sensor (absolute pressure) and external sensor connections (NTC/ capacitive humidity sensor), including wall bracket, lock, battery, testo ComSoft Basic and calibration protocol
Order number	0572 1762	0572 1764	0572 1765	0572 1767
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR	XX.XX EUR
Technical data				
Measurement parameter	Temperature	Temperature	Temperature & humidity	Temperature & humidity & pressure
Easy-to-read display	✓	✓	✓	✓
Extremely high measurement range	✓	✓	✗	✗
Channels	2 x external	4 x external	4 x external	1 x internal, 2 external probes, 4 external channels
Measuring range	-100 to +400 °C	-100 to +750 °C (Type J) -195 to +1000 °C (Type K) -200 to +400 °C (Type T)	-20 to +70 °C 0 to 100 %RH	-20 to +70 °C 0 to 100 %RH 600 to 1100 mbar
Accuracy *±1 digit	±0.2 °C (-100 to +200 °C)* ±0.3 °C (+200.1 to +400°C)*	±1 % of m.v. (-200 to -100.1 °C)* ±0.3 °C (-100 to +70 °C)* ±0.5 % of m.v. (+70.1 to +1000 °C)*	±0.2 °C (-20 to +70 °C)* ±0.4 °C* (remaining meas. range) / probe-specific	±0.2 °C (-20 to +70 °C)* ±0.4 °C* (remaining meas. range) / probe-specific ±3 mbar (0 to +50 °C)*
Solution	0,01 °C	0,1 °C	0.1 °C / 0.1 %RH	0.1 °C / 0.1 %RH / 1 mbar
Measuring cycle	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)
Memory capacity	2 million readings	2 million readings	2 million readings	2 million readings
Interface	Mini USB, SD card slot	Mini USB, SD card slot	Mini USB, SD card slot	Mini USB, SD card slot
Software	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR
Operating/storage temperature	-35 to +70 °C -40 to +85 °C	-20 to +70 °C -40 to +85 °C	-20 to +70 °C -40 to +85 °C	-20 to +70 °C -40 to +85 °C
Battery life	8 years (15 min. measuring cycle, +25 °C)	8 years (15 min. measuring cycle, +25 °C)	8 years (15 min. measuring cycle, +25 °C)	8 years (15 min. measuring cycle, +25 °C)
Dimensions/weight	103 x 63 x 33 mm Approx. 220 g	103 x 63 x 33 mm Approx. 230 g	103 x 63 x 33 mm Approx. 220 g	103 x 63 x 33 mm 230 g
Protection class	IP 65	IP 65	IP 65	IP 54
EN certificate	EN 12830	EN 12830	✗	✗

Stationary data loggers



Extra-robust for harsh environments: testo 176 T1 / T3 / H2

testo 176 loggers in comparison



All data loggers HACCP-certified



General data			
Brief description	1-channel temperature data logger in a metal housing with high-precision internal sensor (Pt100) including wall bracket, lock and battery, testo ComSoft Basic	4-channel temperature data logger in a metal housing with external sensor connections (TC Type T, Type K and Type J) including wall bracket, lock and battery, testo ComSoft Basic	2-channel temperature and humidity data logger in a metal housing with external sensor connections (NTC/capacitive humidity sensor) including wall bracket, lock and battery, testo ComSoft Basic
Order number	0572 1761	0572 1763	0572 1766
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR
Technical data			
Measurement parameter	Temperature	Temperature	Temperature & humidity
Easy-to-read display	-	-	-
Extremely wide measurement range	-	✓	-
Channels	1 x internal	4 x external	2 x external
Measuring range	-35 to +70 °C	-100 to +750 °C (Type J) -195 to +1000 °C (Type K) -200 to +400 °C (Type T)	-20 to +70 °C 0 to 100 %RH
Accuracy *±1 digit	±0.4 °C (-35 to +70 °C)*	±1 % of m.v. (-200 to -100.1 °C)* ±0.3 °C (-100 to +70 °C)* ±0.5% of m.v. (+70.1 to +1000 °C)*	±0.2 °C (-20 to +70 °C)* ±0.4 °C* (remaining meas. range) / probe-specific
Solution	0,01 °C	0,1 °C	0.1 °C / 0.1 %RH
Measuring cycle	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)	1 sec to 24 h (freely selectable, for online measurement 2 sec to 24 h)
Memory capacity	2 million readings	2 million readings	2 million readings
Interface	Mini USB, SD card slot	Mini USB, SD card slot	Mini USB, SD card slot
Software	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR	testo ComSoft Basic testo ComSoft Professional testo ComSoft CFR
Operating/storage temperature	-35 to +70 °C -40 to +85 °C	-20 to +70 °C -40 to +85 °C	-20 to +70 °C -40 to +85 °C
Battery life	8 years (15 min. measuring cycle, +25 °C)	8 years (15 min. measuring cycle, +25 °C)	8 years (15 min. measuring cycle, +25 °C)
Dimensions/weight	103 x 63 x 33 mm Approx. 410 g	103 x 63 x 33 mm Approx. 430 g	103 x 63 x 33 mm Approx. 430 g
Protection class	IP 68	IP 65	IP 65
EN certificate	EN 12830	-	-

Monitors and sounds the alarm: testo Saveris 2



**Online
monitoring
system**

testo Saveris 2 loggers in comparison



All data loggers HACCP-certified



testo Saveris 2-T1



testo Saveris 2-T2



testo Saveris 2-T3

General data			
Brief description	Radio data logger (wireless LAN) with display and internal NTC temperature sensor, including USB cable, wall bracket, batteries and calibration protocol	Radio data logger (wireless LAN) with display for measuring temperature, two connections for external NTC temperature probes or door contacts, incl. USB cable, wall bracket, batteries and calibration certificate	Radio data logger (wireless LAN) with display for measuring temperature, two connections for external TC temperature probes (Types K,T,J) including USB cable, wall bracket, batteries and calibration protocol
Order number	0572 2031	0572 2032	0572 2033
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR
Technical data			
Measurement parameter	Temperature	Temperature	Temperature
High accuracy and large measuring range	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Channels	1x NTC internal	2x NTC external	2x thermocouple Type K/J/T external
Measuring range	-30 to +50 °C	-50 to +150 °C	-195 to +1350 °C (Type K) -100 to +750 °C (Type J) -200 to +400 °C (Type T)
Accuracy	±0.5 °C	±0.3 °C	±(0.5 + 0.5 % of m.v.) °C
Solution	0,1 °C	0,1 °C	0,1 °C
Measuring cycle	With Cloud Advanced licence: 1 min to 24 h	With Cloud Advanced licence: 1 min to 24 h	With Cloud Advanced licence: 1 min to 24 h
Radio frequency	2.4 GHz (IEEE 802.11 b/g/n)	2.4 GHz (IEEE 802.11 b/g/n)	2.4 GHz (IEEE 802.11 b/g/n)
Transmission interval	1 min to 24 h (15 min default)	1 min to 24 h (15 min default)	1 min to 24 h (15 min default)
Operating/storage temperature	-30 to +50 °C / -40 to +50 °C	-30 to +50 °C / -40 to +50 °C	-30 to +50 °C / -40 to +50 °C
Battery life	12 months	12 months	12 months
Dimensions/weight	95 x 75 x 30.5 mm / 240 g	95 x 75 x 30.5 mm / 240 g	95 x 75 x 30.5 mm / 240 g
Protection class	IP 65	IP 65	IP 54
EN certificate	EN 12830	EN 12830	<input type="checkbox"/>

Online
monitoring
system



Monitors and sounds the alarm: testo Saveris 2

testo Saveris 2 loggers in comparison



All data loggers HACCP-
certified



testo Saveris 2-H1



testo Saveris 2-H2




testo 160 IAQ

General data			
Brief description	Radio data logger (wireless LAN) with display for measuring temperature and relative humidity, internal capacitive humidity sensor, including USB cable, wall bracket, batteries and calibration protocol	Radio data logger (wireless LAN) with display for measuring temperature and relative humidity, connection for one external humidity probe, including USB cable, wall bracket, batteries and calibration protocol	Radio data logger (WLAN) with display and integrated sensors for temperature, humidity, CO ₂ and atmospheric pressure. With user-friendly coloured LEDs for display according to the traffic light principle. Incl. free Cloud access (Basic functionality)
Order number	0572 2034	0572 2035	0572 2014
Recommended selling price	XX.XX EUR	XX.XX EUR	XX.XX EUR
Technical data			
Measurement parameter	Temperature & humidity	Temperature & humidity	Temperature, humidity, CO ₂ , atmospheric pressure
High accuracy and large measuring range	-	-	-
Channels	1x NTC/humidity internal	1x NTC /humidity external	1 x NTC humidity / internal 1 x abs. pressure / internal 1 x NDIR / internal
Measuring range	-30 to 50 °C 0 to 100 %RH	dependent on probe	0 to +50 °C 0 to 100 %RH (non-condensing) 0 to 5000 ppm (ambient humidity: 0 to 99 %RH (non-condensing) 600 to 1100 mbar
Accuracy	±0.5 °C / ±2 %RH	dependent on probe	±0.5 °C / ±3.0 %RH at +25 °C and <20 %RH and >80 %RH / ±(50 ppm + 3 % of m.v.) at +25 °C (without external power supply: ±(100 ppm + 3 % of m.v.) at +25 °C) / ± 3 mbar at +22 °C
Solution	0.1 °C / 0.1 %RH	0.1 °C / 0.1 %RH	0.1 °C / 0.1 %RH >1 ppm / 1 mbar
Measuring cycle	With Cloud Advanced licence: 1 min to 24 h	With Cloud Advanced licence: 1 min to 24 h	With Cloud Advanced licence: 1 min to 24 h
Radio frequency	2.4 GHz (IEEE 802.11 b/g/n)	2.4 GHz (IEEE 802.11 b/g/n)	2.4 GHz (IEEE 802.11 b/g/n)
Transmission interval	1 min to 24 h (15 min default)	1 min to 24 h (15 min default)	5 min to 24 h (15 min default)
Operating/storage temperature	-30 to +50 °C / -40 to +50 °C	-30 to +50 °C / -40 to +50 °C	0 to 50 °C / 0 to 50 °C
Battery life	12 months	12 months	12 months (external power supply recommended)
Dimensions/weight	115 x 82 x 31 mm / 240 g	95 x 75 x 30.5 mm / 240 g	117 x 82 x 32 mm / 269 g
Protection class	IP 30	IP 54	IP 20
EN certificate	-	-	-

Overview of order data.

Product description	Order no.	EUR
testo 174 T Mini temperature data logger with USB-C and PC software	<input type="radio"/> 0572 1740 01	XX,XX
	<input checked="" type="radio"/> 0572 1740 02	
testo 174 H Mini data logger for temperature and humidity with USB-C and PC Software	<input type="radio"/> 0572 1741 01	XX,XX
	<input checked="" type="radio"/> 0572 1741 02	
testo 174 T BT Mini temperature data logger with app connection	<input type="radio"/> 0572 1742 01	XX,XX
	<input checked="" type="radio"/> 0572 1742 02	
testo 174 H BT Mini data logger for temperature and humidity with app connection	<input type="radio"/> 0572 1743 01	XX,XX
	<input checked="" type="radio"/> 0572 1743 02	
testo 175 T1 Temperature data logger	0572 1751	XX,XX
testo 175 T2 Temperature data logger	0572 1752	XX,XX
testo 175 T3 Temperature data logger	0572 1753	XX,XX
testo 175 H1 Data logger for temperature and humidity	0572 1754	XX,XX
testo 176 T1 Temperature data logger	0572 1761	XX,XX
testo 176 T2 Temperature data logger	0572 1762	XX,XX
testo 176 T3 Temperature data logger	0572 1763	XX,XX
testo 176 T4 Temperature data logger	0572 1764	XX,XX
testo 176 H1 Data logger for temperature and humidity	0572 1765	XX,XX
testo 176 H2 Data logger for temperature and humidity	0572 1766	XX,XX
testo 176 P1 Data logger for pressure, temperature and humidity	0572 1767	XX,XX
testo 184 T1 USB data logger for temperature	0572 1841	XX,XX
testo 184 T2 USB data logger for temperature	0572 1842	XX,XX
testo 184 T3 USB data logger for temperature	0572 1843	XX,XX
testo 184 T4 USB data logger for temperature	0572 1844	XX,XX
testo 184 H1 USB data logger for temperature and humidity	0572 1845	XX,XX
testo 184 G1 USB data logger for shock, humidity and temperature	0572 1846	XX,XX

Product description	Order no.	EUR
testo Saveris 2-T1 Radio data logger with display and integrated NTC temperature probe	0572 2031	XX,XX
testo Saveris 2-T2 WiFi data logger with display and 2 connections for NTC temperature probes	0572 2032	XX,XX
testo Saveris 2-T3 WiFi data logger with display and 2 connections for TC temperature probes	0572 2033	XX,XX
testo Saveris 2-H1 WiFi data logger with display and integrated temperature and humidity probe	0572 2034	XX,XX
testo Saveris 2-H2 Radio data logger with display and built-in temperature and humidity probe and one external humidity probe	0572 2035	XX,XX
testo 160 IAQ Radio data logger for temperature, humidity, CO ₂ and atmospheric pressure	0572 2014	XX,XX
 testo ComSoft Basic Basic software for programming and reading out Testo data loggers with graphical and tabular display of measured values and Excel export function (included as standard with the testo 174, 175, 176 logger series)	0572 0580	Free download available after registration
 testo ComSoft Professional Professional software for programming, reading and archiving Testo data loggers with extended evaluation and display options	0554 1704	XX,XX
 testo ComSoft 21 CFR Part 11 Intuitive and validatable software for the pharmaceutical industry for programming and reading out Testo data loggers and for data archiving. Provides graphical and tabular display, effortless reporting, digital signature and audit trail in accordance with FDA 21 CFR Part 11 requirements.	0554 1705	XX,XX

- testo 174 series white
 testo 174 series black